




TECHNICAL SPECIFICATION
DESCRIPTION : 4,7LT.RECTANGULAR PP PAIL

Tolerances:
Weight / Volume : $\pm$ %10
Thickness : $\pm$ 0,1mm
Dimensions : $\pm$ 1mm

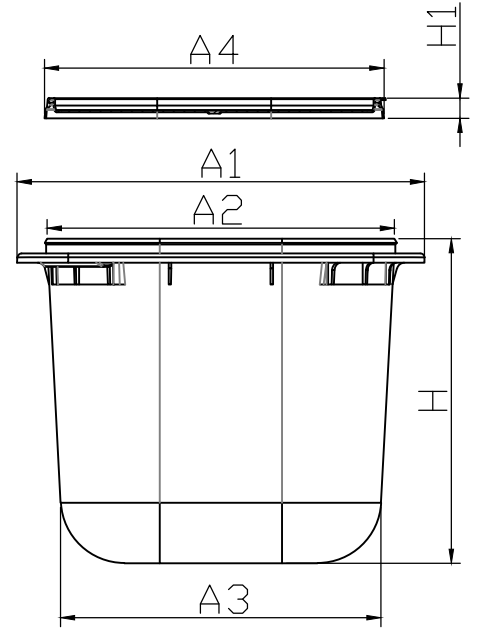

	PAIL ED -47 G		LID ED - 47 G -K	LID ED - 50 G -K
VOLUME TO RIM	4.900 lt.		-----	-----
VOLUME UNDER LID	4.700 lt.		-----	-----
MATERIAL	COPOLYMER PP (ANTISTATIC)		COPOLYMER PP (ANTISTATIC)	
WEIGHT	Pail : 112 gr Handle : -		39gr.	38gr.
DIMENSIONS	A1 : 345X160 mm A2 : 324.50X135,50 mm A3 : 314.87X125.87 mm H : 127.50 mm		A4:333,3X144,22mm H1: 8,50 mm	A4: 332X143 mm H1: 8,50 mm
WALL THICKNESS	Wall Thickness : 0,80 mm Base Thickness : 0,90 mm		Thickness:0,80 mm	Thickness:0,80 mm
DECORATION	I.M.L. Single Side : — Double Side : — Wrap Around : —	OFFSET Offset : — Centering : —	I.M.L. : ✓	I.M.L. : ✓
COLORS	Transparent : ✓ Colored : ✓		Transparent : ✓ Colored : ✓	Transparent : ✓ Colored : ✓
QUANTITY PER PALLET	 x: 1000mm y: 1200mm z: 2350mm	On Base 20 pieces Vertical 94 pieces Total 1880 pieces	 x: 1000mm y: 1200mm z: 2350mm	On Base 20 pieces Vertical 416 pieces Total 8320 pieces
STATIC STACKING LOAD	MAX: 10 KG. Max. Top Load on bottom container at 23°C .			