




TECHNICAL SPECIFICATION
DESCRIPTION : 3,5 lt PP SQUARE PAIL

Tolerances:
Weight / Volume : $\pm$ % 5
Thickness : $\pm$ 0,1mm
Dimensions : $\pm$ 1mm

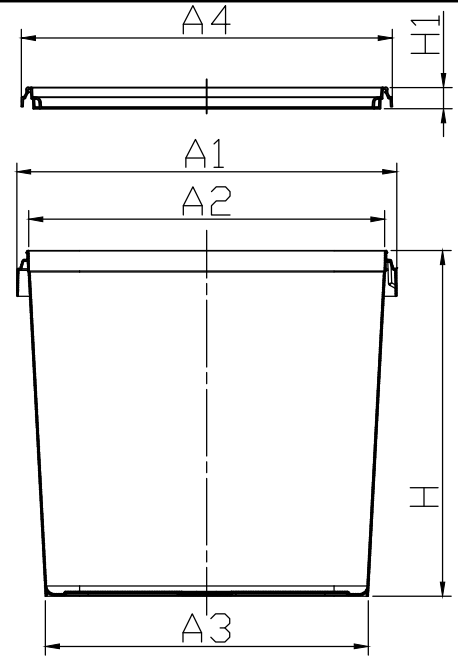

	PAIL EK - 35 G	LID EK - 54 GK	LID EK - 54 GKS
VOLUME TO RIM	3.843 lt.	-----	-----
VOLUME UNDER LID	3.500 lt.	3.500 lt.	3.843 lt.
MATERIAL	COPOLYMER PP (ANTISTATIC)	COPOLYMER PP (ANTISTATIC)	
WEIGHT	Pail : 100 gr Handle : 5 gr	38 gr	43 gr
DIMENSIONS	A1 : 197,00 mm A2 : 183,17 mm A3 : 169,24 mm H : 132,00 mm	A4: 194,10 mm H1: 11,10 mm	A4: 194,10 mm H1: 18,00 mm
WALL THICKNESS	Wall Thickness : 0,75 mm Base Thickness : 0,90 mm	Thickness : 0,90 mm	Thickness : 1,00 mm
DECORATION	I.M.L. Single Side : — Double Side : — Wrap Around : —	OFFSET Offset : — Centering : —	I.M.L. : — I.M.L. : —
COLORS	Transparent : ✓ Colored : ✓	Transparent : ✓ Colored : ✓	Transparent : ✓ Colored : ✓
QUANTITY PER PALLET	 On Base : 30 pcs. Vertical : 82 pcs. Total : 2.460 pcs. x: 1000mm y: 1200mm z: 2400mm	 On Base : 30 pcs. Vertical : 328 pcs. Total : 9.840 pcs. x: 1000mm y: 1200mm z: 2400mm	
STATIC STACKING LOAD	MAX: 15 KG. Max. Top Load on bottom container at 23°C .		