




TECHNICAL SPECIFICATION
DESCRIPTION : 5,4 lt PP SQUARE PAIL

Tolerances:
Weight / Volume : $\pm$ % 5
Thickness : $\pm$ 0,1mm
Dimensions : $\pm$ 1mm

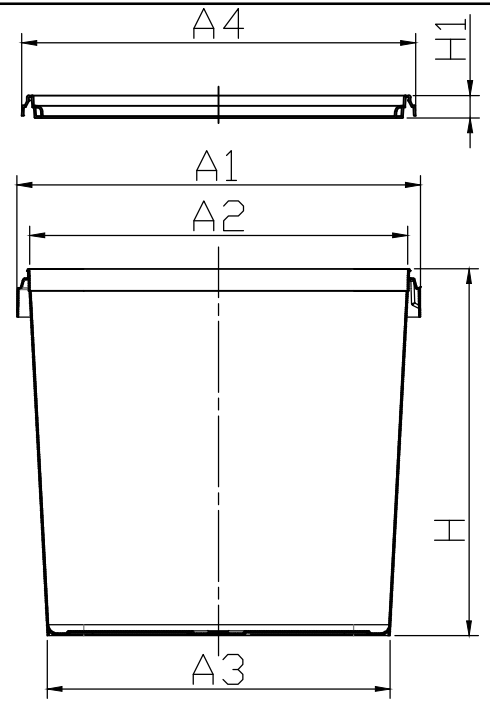

	PAIL EK - 54 G	LID EK - 54 GK	LID EK - 54 GKS
VOLUME TO RIM	5.730 lt.	-----	-----
VOLUME UNDER LID	5.387 lt.	5.387 lt.	5.730 lt.
MATERIAL	COPOLYMER PP (ANTISTATIC)	COPOLYMER PP (ANTISTATIC)	
WEIGHT	Pail : 144 gr Handle : 5 gr	38 gr	43 gr
DIMENSIONS	A1 : 197,00 mm A2 : 184,42 mm A3 : 162,62 mm H : 195,14 mm	A4: 194,10 mm H1: 11,10 mm	A4: 194,10 mm H1: 18,00 mm
WALL THICKNESS	Wall Thickness : 0,85 mm Base Thickness : 1,00 mm	Thickness : 0,90 mm	Thickness : 1,00 mm
DECORATION	I.M.L. Single Side : — Double Side : — Wrap Around : ✓	OFFSET Offset : — Centering : —	I.M.L. : — I.M.L. : —
COLORS	Transparent : ✓ Colored : ✓	Transparent : ✓ Colored : ✓	Transparent : ✓ Colored : ✓
QUANTITY PER PALLET	 x: 1000mm y: 1200mm z: 2400mm On Base : 30 pcs. Vertical : 80 pcs. Total : 2.400 pcs.	 x: 1000mm y: 1200mm z: 2400mm On Base : 30 pcs. Vertical : 320 pcs. Total : 9.600 pcs.	
STATIC STACKING LOAD	MAX: 18 KG. Max. Top Load on bottom container at 23°C .		