


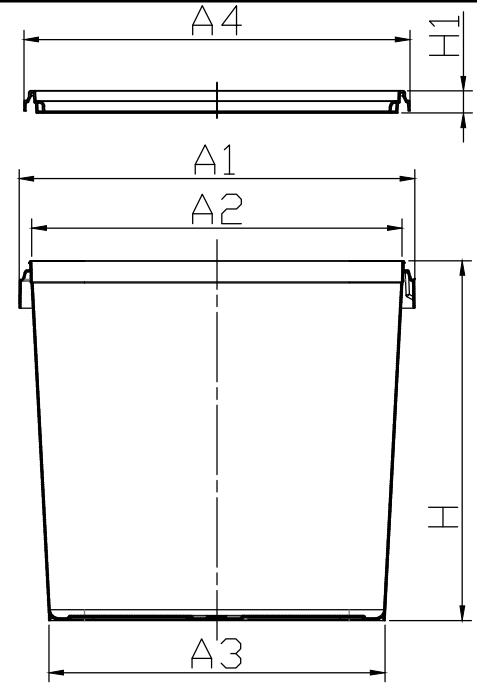

TECHNICAL SPECIFICATION
DESCRIPTION : 8,8 lt PP SQUARE PAIL

Tolerances:
Weight / Volume : $\pm$ % 3
Thickness : $\pm$ 0,1mm
Dimensions : $\pm$ 1mm

	PAIL EK - 88 G	LID EK - 108 GK	LID EK - 108 GKS
VOLUME TO RIM	9.305 lt.	-----	-----
VOLUME UNDER LID	8.737 lt.	8.725 lt.	9.293 lt.
MATERIAL	COPOLYMER PP (ANTISTATIC)	COPOLYMER PP (ANTISTATIC)	
WEIGHT	Pail : 240 gr Handle : 8 gr	58 gr	--- gr
DIMENSIONS	A1 : 239,00 mm A2 : 222,82 mm A3 : 196,85 mm H : 224,50 mm	A4: 236,20 mm H1: 13,20 mm	A4: 236,20 mm H1: 19,30 mm
WALL THICKNESS	Wall Thickness : 1,10 mm Base Thickness : 1,20 mm	Thickness : 1,00 mm	Thickness : 1,00 mm
DECORATION	I.M.L. Single Side : ☒ Double Side : ☒ Wrap Around : ☒	OFFSET Offset : — Centering : —	I.M.L. : ☒ I.M.L. : ☒
COLORS	Transparent : ☒ Colored : ☒	Transparent : ☒ Colored : ☒	Transparent : ☒ Colored : ☒
QUANTITY PER PALLET	 x: 1000mm y: 1200mm z: 2400mm On Base : 20 pcs. Vertical : 78 pcs. Total : 1.560 pcs.	 x: 1000mm y: 1200mm z: 2400mm On Base : 20 pcs. Vertical : 312 pcs. Total : 6.240 pcs.	
STATIC STACKING LOAD			